




CP1100

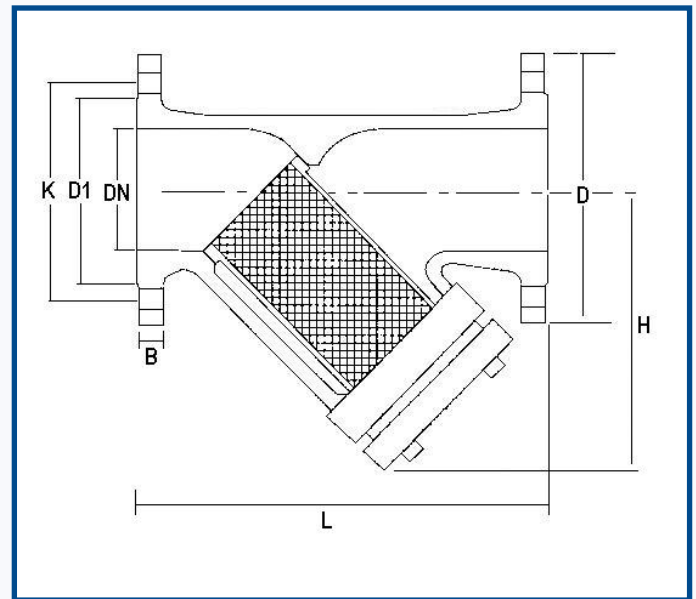

MATERIALS

Body:	Ductile Iron GGG40
Strainer:	Stainless Steel 304
Cover:	Cast Iron GG25
Washer:	PTFE & Graphite
Bolt:	Cast Iron GG25

CONNECTIONS

Flanged to PN16

SIZE		2"	2 1/2"	3"	4"	5"	6"	8"	
DN (mm)		50.0	65.0	80.0	100.0	125.0	150.0	200.0	
ØD (mm)		165.0	185.0	200.0	220.0	250.0	285.0	340.0	
ØD1 (mm)		88.0	112.0	125.0	145.0	180.0	210.0	255.0	
L (mm)		230.0	290.0	310.0	350.0	400.0	280.0	600.0	
ØK (mm)		125.0	145.0	160.0	180.0	210.0	240.0	295.0	
n-Ø Ød (mm)		4-Ø18	4-Ø18	8-Ø18	8-Ø18	8-Ø18	8-Ø22	12-Ø22	
H (mm)		134.0	182.0	208.0	240.0	280.0	325.0	400.0	
b (mm)		18.0	20.0	22.0	26.0	26.0	28.0	31.0	
Filtrarion (Mesh)		80.0	80.0	80.0	80.0	80.0	80.0	80.0	
Rating		PN16	PN16	PN16	PN16	PN16	PN16	PN16	
Weight (kg)		8.50	14.50	17.60	26.00	35.00	50.00	100.00	

Pressure and temperature ratings are minimum and maximum values only and actual performance will be dependant upon application.

All images on this page are for guidance only. E&OE. We reserve the right to amend specifications, prices & products without prior notification