

## **CP7061**

BRONZE HORIZONTAL

LIFT CHECK VALVE


-10 °C to +180 °C

PN25 BSP



۲/	U'	6]

MATERIALS					
Body:	Bronze CC491K UNI EN1982				
Cap (1/4" - 1 1/2"):	Brass CW614N				
Cap (2" - 4"):	Bronze CC491K UNI EN1982				
Disc: (1/4" - 1 1/2"):	Brass CW614N				
Disc: (2" - 4")	Bronze CC491K UNI EN1982				

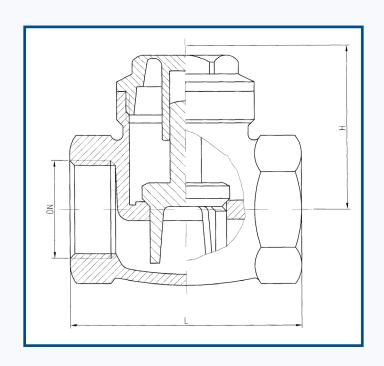

## CONNECTIONS

BSP Parrallel: ISO228

(equivalent to DIN 259 and BS 2779)

SIZE	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2″	2 1/2"	3″	4"
L (mm)	46.0	46.0	55.0	62.0	74.0	90.0	100.0	128.0	145.0	170.0	210.0
H (mm)	30.0	30.0	35.0	40.0	45.0	60.0	60.0	70.0	90.0	100.0	110.0
Rating	PN25	PN25	PN25	PN25	PN25	PN25	PN25	PN25	PN25	PN25	PN25
Weight (kg)	0.190	0.190	0.280	0.464	0.700	1.160	1.400	2.510	3.500	6.400	12.100

Pressure and temperature ratings are minimum and maximum values only and actual performance will be dependant upon application.

All images on this page are for guidance only. E&OE. We reserve the right to amend specifications, prices & products without prior notification